



**SPC BENCHMARK 1C™
EXECUTIVE SUMMARY**

SEAGATE TECHNOLOGY LLC (*TEST SPONSOR*)
SAMSUNG SPINPOINT F1 HD103UJ

SPC-1C™ V1.1

Submitted for Review: October 15, 2008

Submission Identifier: C00004

Revised: October 16, 2008

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Seagate Technology LLC – http://www.seagate.com Craig Parris – Craig.Parris@seagate.com 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2418 FAX: (952) 402-2695
Test Sponsor Alternate Contact	Seagate Technology LLC – http://www.seagate.com Jeff Crist – Jeff.Crist@seagate.com 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2840 FAX: (952) 402-2840
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1C Specification revision number	V1.1
SPC-1C Workload Generator revision number	V1.0
Date Results were first used publicly	October 15, 2008
Date the FDR was submitted to the SPC	October 15, 2008
Date the revised FDR was submitted to the SPC Revised the Tested Storage Product (TSP) description to reference the correct product.	October 16, 2008
Date the TSC is available for shipment to customers	currently available
Date the TSC completed audit certification	October 1, 2008

Tested Storage Product (TSP) Description

The Samsung Spinpoint F1 (HD103UJ) desktop HDD is the first three-platter hard drive delivering a 1TB of capacity, using state of the art perpendicular recording technology. With its compact, lightweight package and advanced design, the F1 drive offers strong sequential performance and lowest power in class for high-density storage applications.

Summary of Results

SPC-1C Results	
Tested Storage Product: Samsung Spinpoint F1 HD103UJ	
Metric	Reported Result
SPC-1C IOPS™	119.44
Total ASU Capacity	500.103 GB
Data Protection Level	Unprotected
Total Price – Priced Storage Configuration	\$406.17

SPC-1C IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-1C benchmark.

A **Data Protection Level** of “Unprotected” makes no claim of data protection in the event of a single point of failure.


Storage Capacities and Relationships

The Tested Storage Configuration (TSC) must be configured so that there is either no Unused Storage or that the sum of Total ASU Capacity and storage required for data protection equals 50% (+-1 GiB) of the Physical Storage Capacity. This configuration meets the 50% requirement as documented below:

$$1,000.205 \text{ GB (Physical Storage Capacity)} * 0.5 = 500.102 \text{ GB}$$

$$500.103 \text{ GB (Total ASU Capacity)} + 0.000 \text{ GB (data protection)} = 500.103 \text{ GB}$$


The following diagram documents the various storage capacities, used in this benchmark, and their relationships.

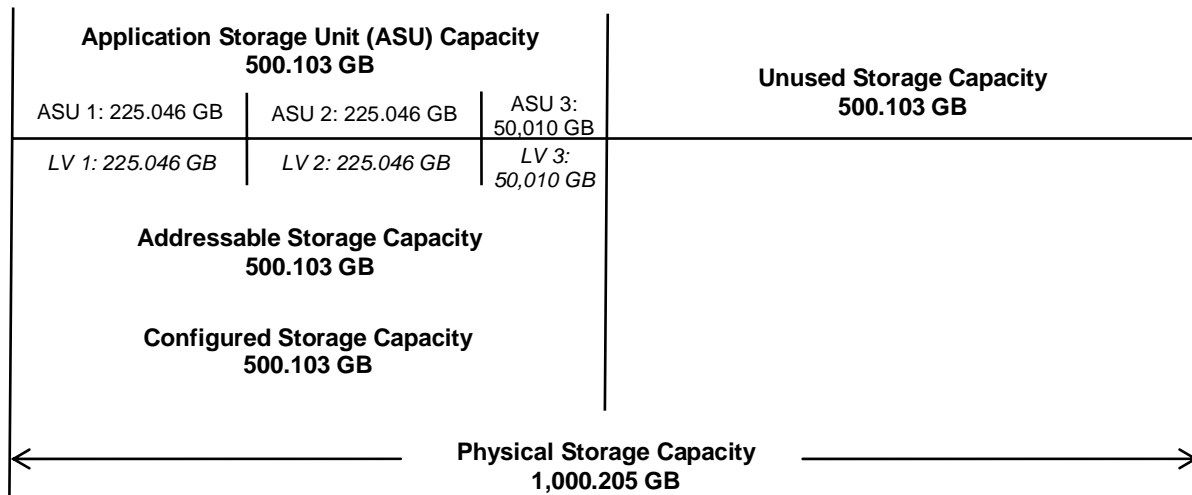

Response Time - Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at the any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

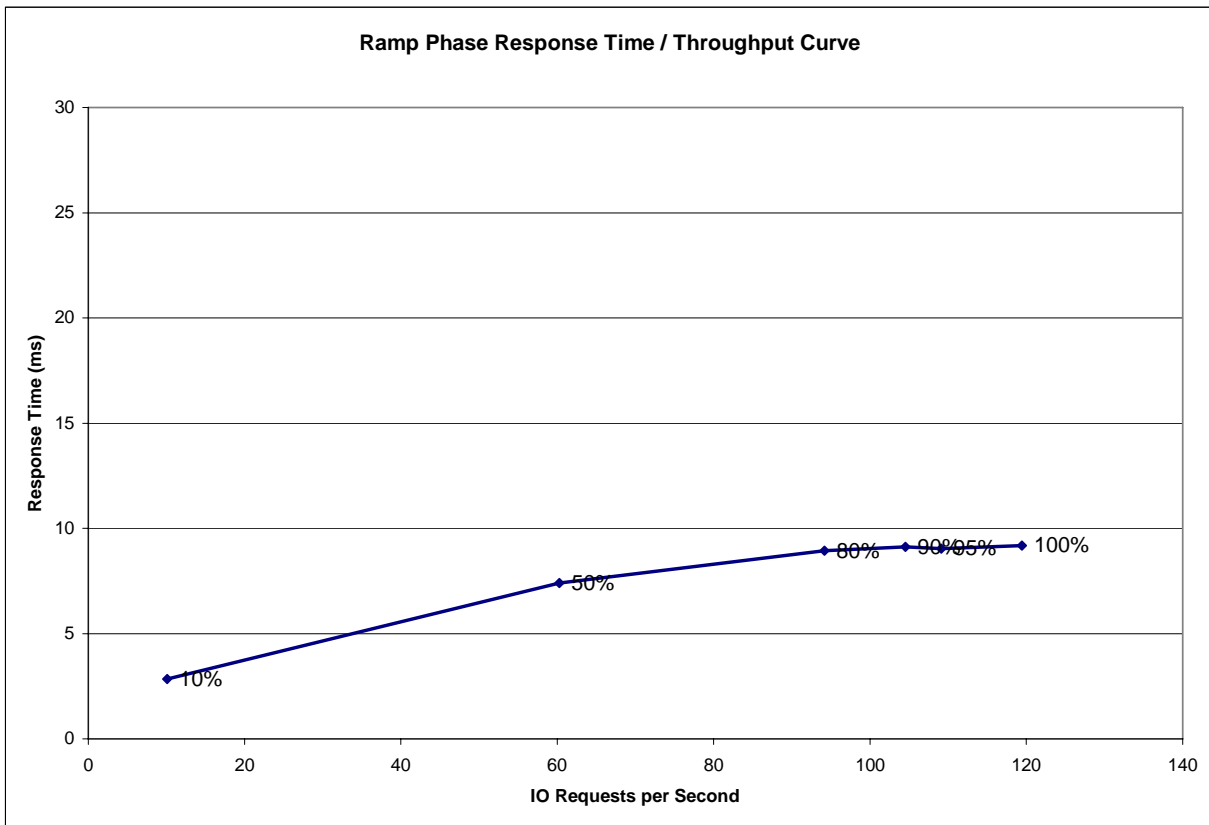

Response Time - Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	10.09	60.28	94.19	104.54	109.13	119.44
Average Response Time (ms):						
All ASUs	2.84	7.41	8.94	9.12	9.03	9.17
ASU-1	4.01	9.20	10.86	11.11	10.95	11.08
ASU-2	2.67	8.79	10.93	10.96	11.10	11.77
ASU-3	0.48	3.04	4.04	4.14	4.07	4.06
Reads	6.79	14.15	16.56	16.95	16.73	17.21
Writes	0.44	3.00	4.01	4.10	4.00	4.02

Tested Storage Configuration Pricing (*Priced Storage Configuration*)

Description	Part Numbers	Qty	Price	Extended Price
1TB GB SATA 3.5" HDD	HD103UJ	1	193.09	193.09
SAS HBA (incl 4 SAS/SATA -1M Cables)	LSI00033-F	1	213.08	213.08
			Total	\$406.17

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the Tested Storage Configuration and the Priced Storage Configuration.

Benchmark Configuration/Tested Storage Configuration Diagram



Benchmark Configuration/Tested Storage Configuration Components

Host System:	Tested Storage Configuration (TSC):
HS-1	1 – LSI SAS3041X-R HBA
"White Box" Host System: Supermicro X6DH*-XG2 motherboard 2 – 2.8 GHz Intel® Xeon™ CPUs 16 KB L1 cache per CPU 1024 KB L2 cache per CPU 2 GB main memory	1 – Samsung Spinpoint F1 HD103UJ SATA disk drive
	1 – Point-to-point cable connection
Windows 2003 Enterprise Edition	
PCIe	