



**SPC BENCHMARK 2C™
EXECUTIVE SUMMARY**

SEAGATE TECHNOLOGY LLC (*TEST SPONSOR*)
SAMSUNG SPINPOINT F1 RAID CLASS HE103UJ

SPC-2C™ V1.1

Submitted for Review: December 3, 2008
Submission Identifier: D00006

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Seagate Technology LLC – http://www.seagate.com Craig Parris – Craig.Parris@seagate.com 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2418 FAX: (952) 402-2695
Test Sponsor Alternate Contact	Seagate Technology LLC – http://www.seagate.com Jeff Crist – Jeff.Crist@seagate.com 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2840 FAX: (952) 402-2840
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-2C Specification revision number	V1.1
SPC-2C Workload Generator revision number	V1.0
Date Results were first used publicly	December 3, 2008
Date FDR was submitted to the SPC	December 3, 2008
Date the TSC will be available for shipment to customers	currently available
Date the TSC completed audit certification	October 6, 2008

Tested Storage Product (TSP) Description

Utilizing Samsung-developed perpendicular recording technology, the new Spinpoint F1 RAID-class hard disk drive (F1R) delivers the solid performance, low power, reliability, compatibility and high capacity that the enterprise needs.

The F1R meets the industry's highest quality standards with a mean time between failure (MTBF) of up to 1.2 million hours. The F1R also offers enterprise class functions such as command completion time limit and vibration tolerance with RV controller (RVC). It features a 16 or 32MB cache, a Serial ATA 3.0Gbps interface, a 175MB/s maximum media transfer rate, and NCQ for random I/O performance.

SPC-2 Reported Data

SPC-2 Reported Data consists of three groups of information:

- The following SPC-2 Primary Metrics, which characterize the overall benchmark result:
 - SPC-2 MBPS™
 - SPC-2 Price Performance
 - Application Storage Unit (ASU) Capacity
- Supplemental data to the SPC-2 Primary Metrics.
 - Total Price
 - Data Protection Level
- Reported Data for each SPC Test: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand Delivery (VOD) Test.

SPC-2C Reported Data			
Samsung Spinpoint F1 RAID Class HE103UJ			
SPC-2C MBPS™	ASU Capacity (GB)	Total Price	Data Protection Level
51.98	500.103	\$470.07	Unprotected
<i>The above SPC-2C MBPS™ value represents the aggregate data rate of all three SPC-2C workloads: Large File Processing, Large Database Query, and Video On Demand</i>			
SPC-2 Large File Processing (LFP) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
LFP Composite	69.28		
Write Only:			
1024 KiB Transfer	110.75	5	22.15
256 KiB Transfer	109.26	5	21.85
Read-Write:			
1024 KiB Transfer	58.80	5	11.76
256 KiB Transfer	57.51	5	11.50
Read Only:			
1024 KiB Transfer	56.01	5	11.20
256 KiB Transfer	23.36	5	4.67
<i>The above SPC-2C Data Rate value for LFP Composite represents the aggregate performance of all three LFP Test Phases: (Write Only, Read-Write, and Read Only).</i>			
SPC-2 Large Database Query (LDQ) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
LDQ Composite	59.15		
1024 KiB Transfer Size			
4 I/Os Outstanding	70.85	5	14.17
1 I/O Outstanding	56.88	5	11.38
64 KiB Transfer Size			
4 I/Os Outstanding	101.03	5	20.21
1 I/O Outstanding	7.81	5	1.56
<i>The above SPC-2C Data Rate value for LDQ Composite represents the aggregate performance of the two LDQ Test Phases: (1024 KiB and 64 KiB Transfer Sizes).</i>			
SPC-2 Video On Demand (VOD) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
	27.53	35	0.79

SPC-2 MBPS™ represents the aggregate data rate, in megabytes per second, of all three SPC-2 workloads: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand (VOD).

ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-2 benchmark.

A **Data Protection Level** of “Unprotected” makes no claim of data protection in the event of a single point of failure.


Storage Capacities and Relationships

The Tested Storage Configuration (TSC) must be configured so that there is either no Unused Storage or that the sum of ASU Capacity and storage required for data protection equals 50% (+-1 GiB) of the Physical Storage Capacity. This configuration meets the 50% requirement as documented below:

$$1,000.205 \text{ GB (Physical Storage Capacity)} * 0.5 = 500.102 \text{ GB}$$

$$500.103 \text{ GB (ASU Capacity)} + 0.000 \text{ GB (data protection)} = 500.103 \text{ GB}$$

The following diagram (*not to scale*) documents the various storage capacities, used in this benchmark, and their relationships.

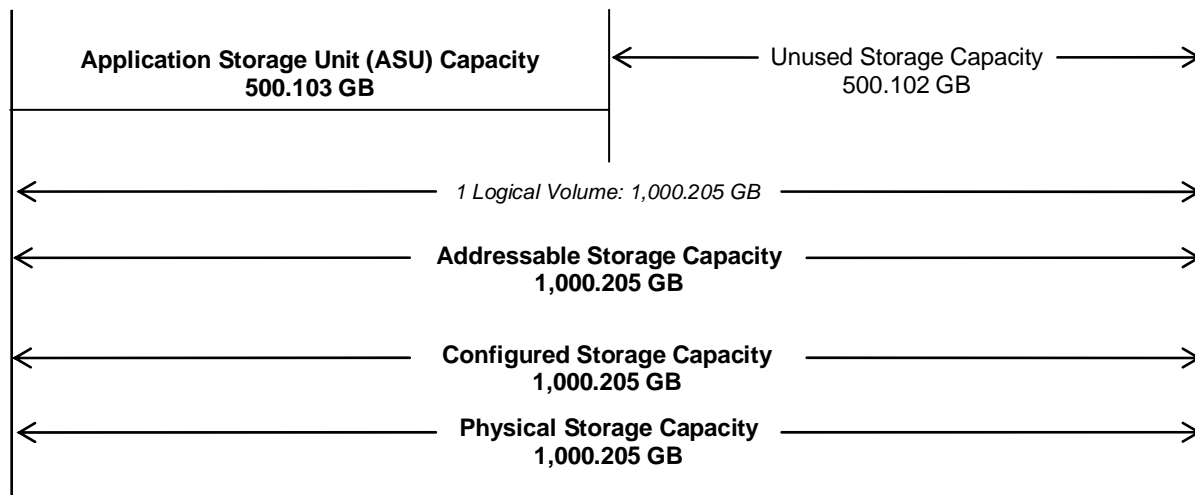

Tested Storage Configuration Pricing (*Priced Storage Configuration*)

Description	Part Numbers	Qty	Price	Extended Price
1TB GB SATA 3.5" HDD	HE103UJ	1	256.99	256.99
SAS HBA (incl 4 SAS/SATA -1M Cables)	LSI00033-F	1	213.08	213.08
			Total	\$470.07

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and the Priced Storage Configuration.

Benchmark Configuration/Tested Storage Configuration Diagram



Host System(s) and Tested Storage Configuration Components

Host System:	Tested Storage Configuration (TSC):
HS-1	1 – LSI SAS3041X-R HBA
"White Box" Host System: Supermicro X6DH*-XG2 motherboard 2 – 2.8 GHz Intel® Xeon™ CPUs 16 KB L1 cache per CPU 1024 KB L2 cache per CPU 2 GB main memory	1 – Samsung Spinpoint F1 RAID Class HE103UJ SATA disk drive 1 – Point-to-point cable connection
Windows 2003 Enterprise Edition	
PCIe	